


References for preparation of the connections

WASHLET™ SG 2.0 TCF403REGV1

Before installation, be sure to read the installation manual and the separate safety precautions sheet. The connection material for electricity and water, to be prepared on the installation frame, is not included with the WASHLET™.

Default connection positions

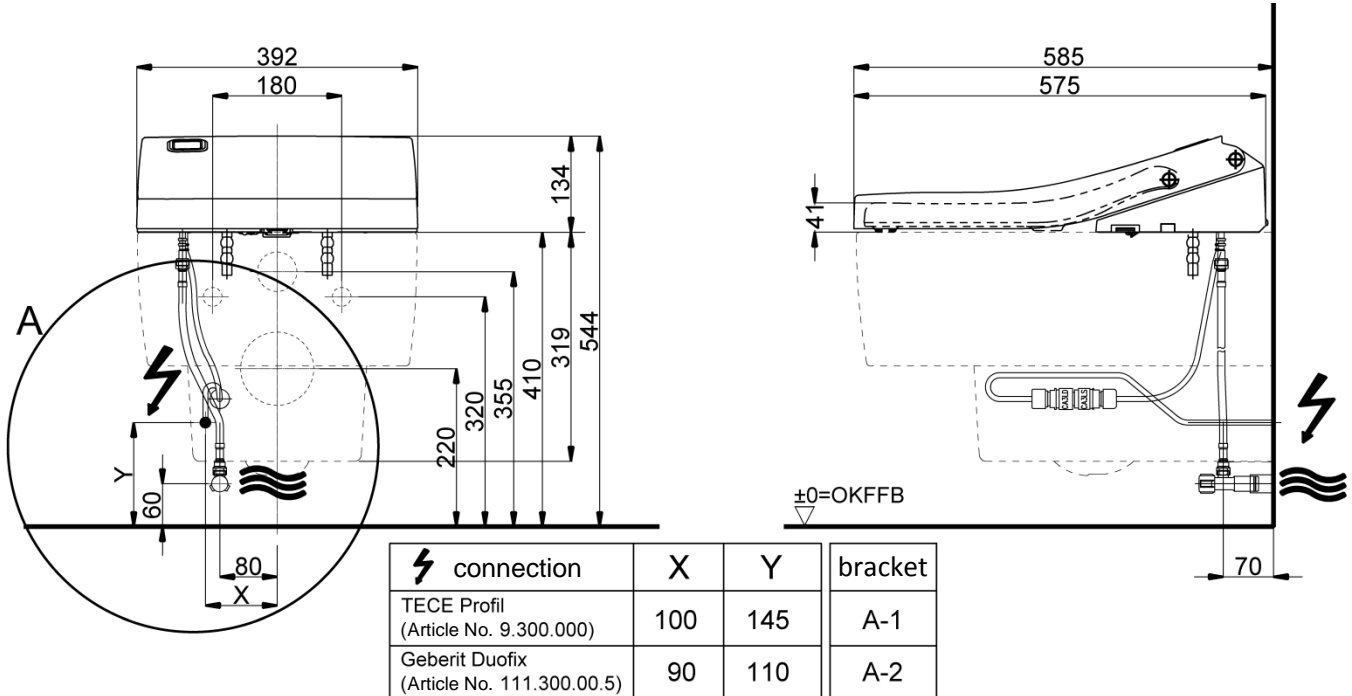

To be provided on site




Water connection

- Angle valve 3/8" (included within WASHLET™ SG 2.0)
- Pressure min. 0,1 MPa (dynamic)
Pressure max. 1,0 MPa (static)
- Recommended upgrade set T9880039A



Electrical connection

- Flexible power cord 450 mm, H05VV-F 3G1.00mm²
- Hirschmann electrical connector (included within WASHLET™ SG 2.0)
- Power supply 220 - 240 V ~ 50/60 Hz
- Max. power rating 1528 W (0°C water temperature)



TOTO T9880039A

Recommended for the water connection: TOTO WASHLET™ SG 2.0 Upgrade set for Installation frame for a simplified water connection, Article No. T9880039A, includes bracket and mounting hardware (bracket A-1 for TECEprofil 9300000, bracket A-2 for Geberit Duofix 111.300.00.5).

Install the angle valve (within the delivery content of the WASHLET™ SG 2.0) prior to install the toilet bowl.

Install a Residual Current Circuit Breaker (RCCB) ($I_n = 30 \text{ mA}$) that disconnects all phases from mains.